



Inspiring green-energy since 2003

## PERC Technology

# AE POWERPLUS MONOCRYSTALLINE PV MODULES AE M6-72 Series 345W-360W

tested by  **Fraunhofer**  
CSP

<b>72</b> CELLS	 MICRO-CRACK FREE	 PID RESISTANT	 SALT CORROSION RESISTANT	 SAND RESISTANT	$\frac{NH_3}{S}$ AMMONIA RESISTANT	 HIGHLY STABLE AND TOUGH
--------------------	--	---	--	---	--	---


**GERMAN QUALITY**  
AE Solar photovoltaic modules are produced using high quality materials, automated robotic lines, German technology and standards.

**PLUS-SORTING**  
Higher yield due to plus-sorting from 0 up to +5 Wp guarantees the high system efficiency and yield stability.

**PERFORMANCE GUARANTEE**  
AE Solar assures high investment, security and warranty claims by providing linear performance guarantee of 30 years and 12 years of product warranty.

**CERTIFICATES**  
Lining with international standards, AE Solar Photovoltaic modules are tested and certified under extreme stress conditions and it can bear harsh environment influences.

### OUR PERFORMANCE GUARANTEE

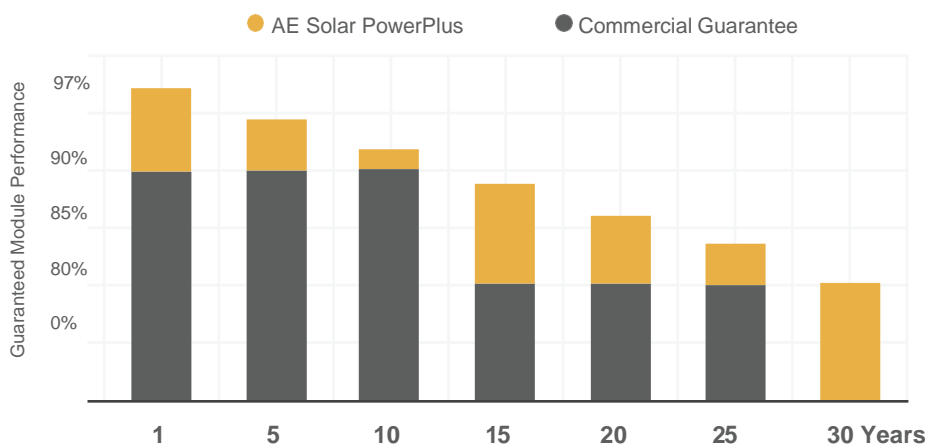

**Deutsche  
Qualität  
Garantiert**

# TECHNICAL DATA

## AE M6-72 Series 345W-360W

### SPECIFICATIONS

		AE345M6-72	AE350M6-72	AE355M6-72	AE360M6-72
Nominal Max. Power	P <sub>max</sub> (Wp)	345	350	355	360
Maximum power voltage	V <sub>mp</sub> (V)	39,34	39,46	39,51	39,55
Maximum power current	I <sub>mp</sub> (A)	8,77	8,87	8,99	9,10
Open-circuit voltage	V <sub>oc</sub> (V)	47,08	47,149	47,3	47,38
Short-circuit current	I <sub>sc</sub> (A)	9,51	9,551	9,58	9,62
Module efficiency	(%)	17,78	18,04	18,30	18,55
Power tolerance	P <sub>max</sub> (Wp)	0 / + 5			
Maximum system voltage DC	(V)	1000			
Operating temperature	(°C)	-40 to +85			
Temp. coefficients of P <sub>max</sub>	(%/°C)	-0.38			
Temp. coefficients of V <sub>oc</sub>	(%/°C)	-0.29			
Temp. coefficients of I <sub>sc</sub>	(%/°C)	0.050			
Nom. Operating cell temp.(NOCT)	(°C)	45±2			

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m<sup>2</sup> with spectrum AM 1.5 and a cell temperature of 25°C.

### MATERIAL CHARACTERISTICS

Cell type	Mono-crystalline 156 x 156mm
No. of cells	72 (6 x 12)
Dimensions	1956 x 992 x 40mm
Weight	23 kg
Junction box	IP 67 rated
Output cable	1 x 4.0mm <sup>2</sup> , 900mm length or customised
Connector type	MC 4 / MC 4 compatible
Hail resistance	Max. Ø 28 mm, at 23 m/s
Wind load	2400 Pa / 244 kg/m <sup>2</sup>
Mechanical load	5400 Pa / 550 kg/m <sup>2</sup>

### PACKAGING INFORMATION

Packing configuration	56 pcs / double pallet
Loading Capacity	672 pcs / 40HQ
Size / pallet (mm)	1990 x 1120 x 2335
Weight	1380 kg / pallet

### CERTIFICATES



### DIMENSIONS

